

Specifications

MODEL	GSC ①-1 ③	GSC ①-2 ③
Fluid used	Air	
Type of Seal	Metal Seal	
Solenoid Valve	2 Position Double	
Maximum Pressure	0.7 MPa	
Proof Pressure	1.0 MPa	
Fluid Temperature Range	-5 ~ 60 °C	
Orifice Area	15mm ²	32.4mm ²
Air Piping Diameter	∅ 6	∅ 10
Protection Structure	Dust Proof	
Oil Supply	Nil	


Class Designation



※ : Applicable clamp size shown are for the case when 4 clamps are used per one circuit. When 5 clamps are being used per one circuit, contact us for details.

Remark : The minimum air pressure necessary for unclamp action is 0.39 MPa. Be sure to use at more than 0.39 MPa air pressure.

Dimensions

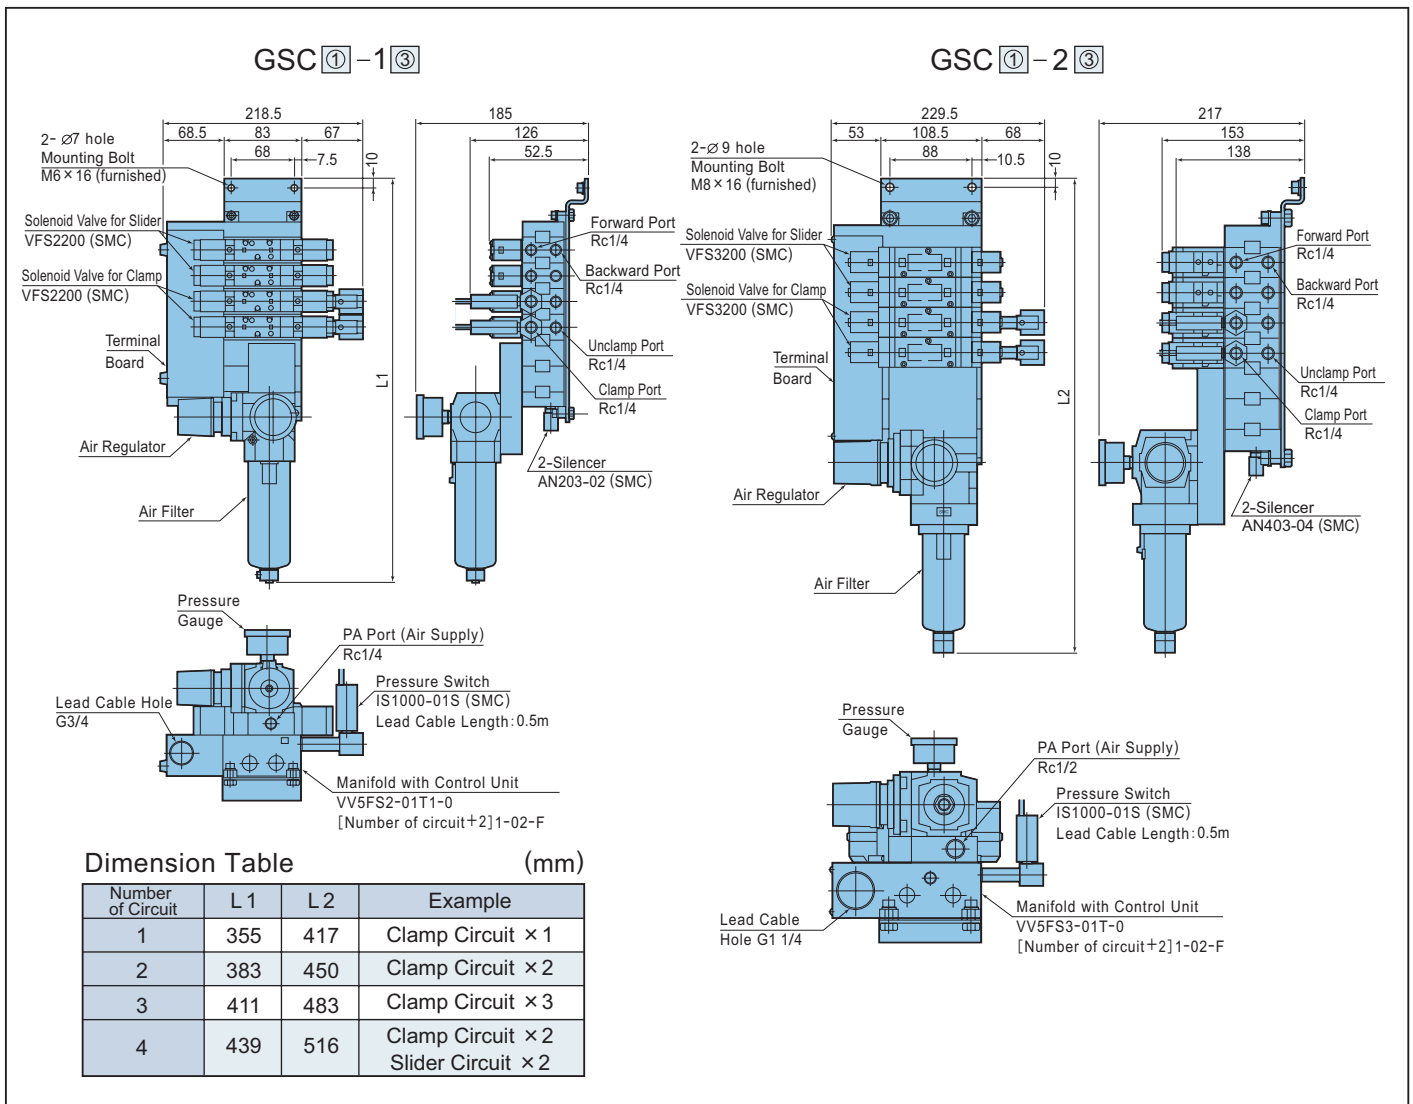

Specifications are subject to change without prior notice.

QMC-06E-2 2007.01